

IL-2 STURMOVIK: Battle of Stalingrad

Lavotškin LaGG-3

Description

- Single-seat fighter plane LaGG-3 series 29.
- Engine M-105PF, V-12, take off power 1210 h.p. with 2700 rpm, boost rated at Pk = 1050 mm.
- Empty weight (with coolant water and armament) - 2620 kg.
- Fuel load - 350 kg.
- Take-off weight - 3160 kg.

Maximum true (indicated) level airspeeds, RPM = 2700, Pk=1050 mm.:

- H = 0m; V = 505 km/h (505 km/h); Pk = 1050 mm
- H = 2000m; V = 548 km/h (497 km/h); Pk = 1050 mm
- H = 4000m; V = 572 km/h (468 km/h); Pk = 1050 mm

Climb times (vertical climb speed), RPM = 2700:

- H = 1000m; t = 1 min. 6 sec.; Vy = 15.4 m/s; Pk = 1050 mm
- H = 2000m; t = 2 min. 15 sec.; Vy = 13.5 m/s; Pk = 945 mm
- H = 4000m; t = 4 min. 47 sec.; Vy = 12.1 m/s; Pk = 965 mm
- H = 6000m; t = 8 min. 10 sec.; Vy = 8.0 m/s; Pk = 770 mm.

Engine start and warm-up

- Set mixture selector to shut position (fully backward);
- Close water and oil radiator shutters.
- Set prop pitch control fully backwards (low pitch).
- Set throttle control to low.
- Start the engine and wait for stable engine operation with low RPM.
- Engine warm-up RPM during winter time is between 900-1200 RPM, normal coolant temperature is 60°C without relation on oil temperature.
- Check wheel brakes operation during taxi by pressing brake clutch and slowly advancing the throttle, keep airplane tail in down position. Airplane should start moving with 1850-1900 RPM, after check - pull back throttle and depress brake clutch.

Taking-off

- Fully open water and oil shutter.
- Set propeller control fully advanced (night pitch).
- You may use flaps down 15-20 degrees position for shorten take-off roll.
- Make sure that runway is clear before rolling.
- Softly advance throttle to its maximum position.
- When rolling, keep your run straight and perform take off with slightly lowered tail.
- Push left rudder correspondingly to airplane tendency to yaw to the right. With rapid throttle increasing and tail up - airplane tendency to right yaw is higher.
- When taking-off with side winds the airplane will try to keep its nose into the wind.
- To make your take-off roll straight check forward view by leaning to the left from gunsight.
- Airplane gets airborne at around 180-190 km/h. Do not force airplane to go airborne at lower speeds as airplane controls are ineffective and it may lead to ground bumping by main wheels.
- After take-off at 250 km/h you may lower you flaps at 100m height. Perform climb at 270 km/h.
- Retract your gear and control it with cockpit light indicators and double check by mechanical indicators on wings.

Climbing

- Climb speed is 270 km/h with 2550-2700 RPM depending on water and oil temps.
- At altitudes higher than 4000 meters lower your climb speed by -10km/h with every 1000 meters of height.
- Maximum water temperature is 110°C. In case of engine overheat lower engine RPM to 2300 and perform climbing with higher speeds.
- Recommended water and oil temperatures are between 90-100°C.
- Switch supercharger to 2nd gear after 2000m height.
- When climbing you may use mixture selector to lean the engine after 3000m of height.


Level flight

- Perform switch from climb to level flight by following steps:
 - *set your speed with throttle position but no lower than 250 km/h indicated at all altitudes;
 - *after that adjust engine RPM correspondingly to airspeed with propeller pitch control; if airspeed drops due to lower pitch RPM setting, increase your throttle setting.
- In case when re-set from low speed flight to higher speed flight:
 - *close mixture selector;
 - *set prop pitch control correspondingly to speed needed;
 - *only after that advance throttle control.
- In case of combat and maximum speed flight steps to follow is:
 - *close mixture corrector;
 - *set RPM to 2650-2700 for all altitudes;
 - *set radiator shutters control by airflow position;
 - *in case when flight higher than 2000m set supercharger to 2nd gear position.
- Routine flights, ferry flights, for best fuel consumption before entering combat areas and such, follow next recommendations: Set RPM to 1700, indicated airspeeds: for 5000m alt - 280 km/h, over 5000m - 270km/h.

Gliding and landing

- Before gliding approach set RPM to 2600 with your pitch control, that makes touch and go easier in case of go-around after faulty landing attempt.
- Gliding speed with gear down is 250-260 km/h indicated, with flaps down to 60° - 210-220 km/h; minimal gliding speed with flaps down to 60° - 200 km/h.
- You should always beware that during maneuvering LaGG-3 bleeds its speed badly and gains it very slowly.
- On approach set gear down before Zith turn with speed 300-320 km/h. Glidepath is much steeper with flaps down than with flaps up.
- Go-around decision alt is no lower than 50 meters. When go-around apply throttle gently and keep airspeed over 250 km/h, flaps up on alts over 100-150 meters.
- Correct landing approach is a key for safe landing, follow next steps with LaGG-3 on landing approach:
 - * glidepath after 3rd turn should be with 90° to landing course;
 - *when gliding after 3rd turn with 90° to landing marks on side you can correct your flight parameters on final approach;
 - *last turn (to final approach) make with 90° turn; all of these makes your final approach position parallel to landing signs;
 - *when approach correction after final turn allowed to bank airplane but not higher than 115° (left or right).
- Keep your airspeed before pull for leveling, keep alt around 8-6 m.
- Final leveling before touch down should be not higher than 1 m with follow down to 0,5 - 0,25 m.
- Leveling should be performed with slow stick back movement. Airplane with flaps down loses its speed fast and performs three point landing.
- When at high alt leveling is not allowed to push stick forward. In this case - keep your stick position fixed and depress stick gently following by airplane position to runway and altitude drop.
- Its forbidden to rapidly pull stick back on final landing (for three point landing) in any situation, as it may lead to bump of runway or stalling on wing.
- Apply brakes only after three point landing after fully applied stick back and airplane rolling straight (estimated brakes apply is around 1/3 of ground landing roll distance).
- Do not apply brakes and rudder movements rapidly as it may cause airplane ground looping or to change direction. When landing on snow apply brakes carefully.

Cockpit layout

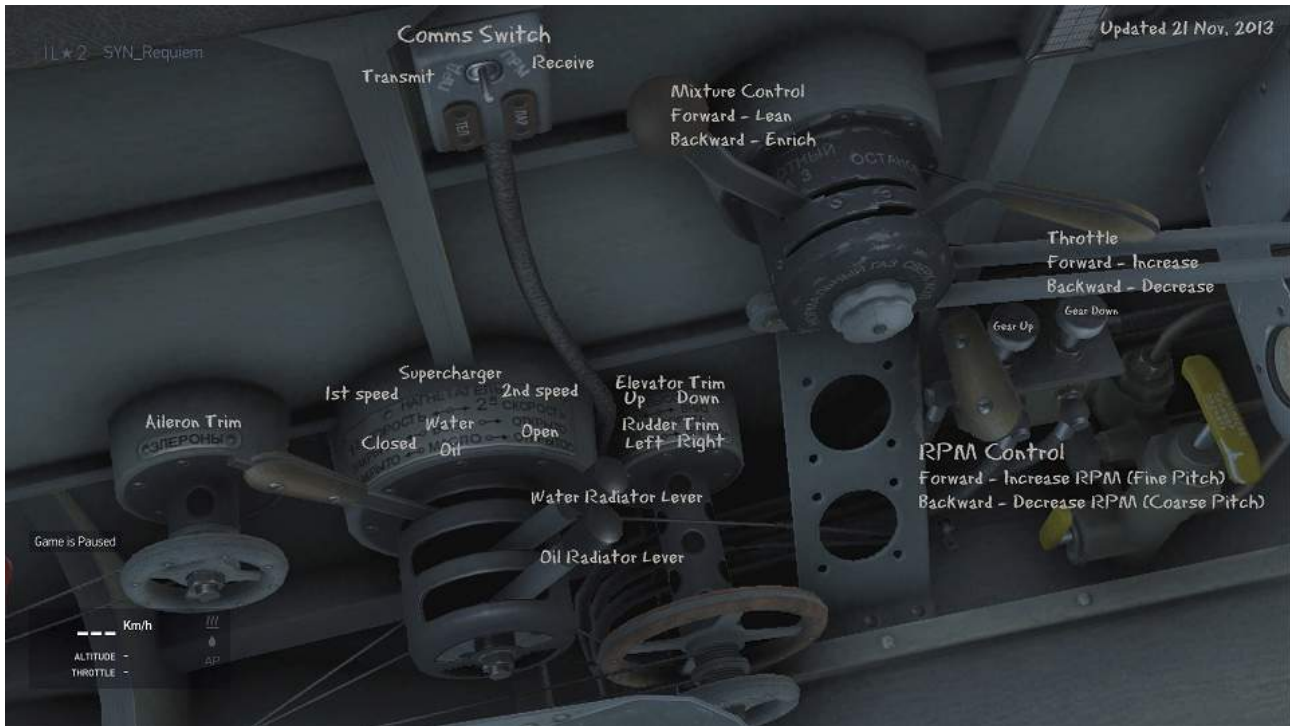



Edited by Zwoop
Cockpit translation by SYN_Requiem

Last update 22 november 2013